




# Creative Zen V Plus Headphone Jack Replacement

This guide shows the steps to replace a faulty headphone jack of a Creative Zen V Plus.

Written By: Joshua Meines

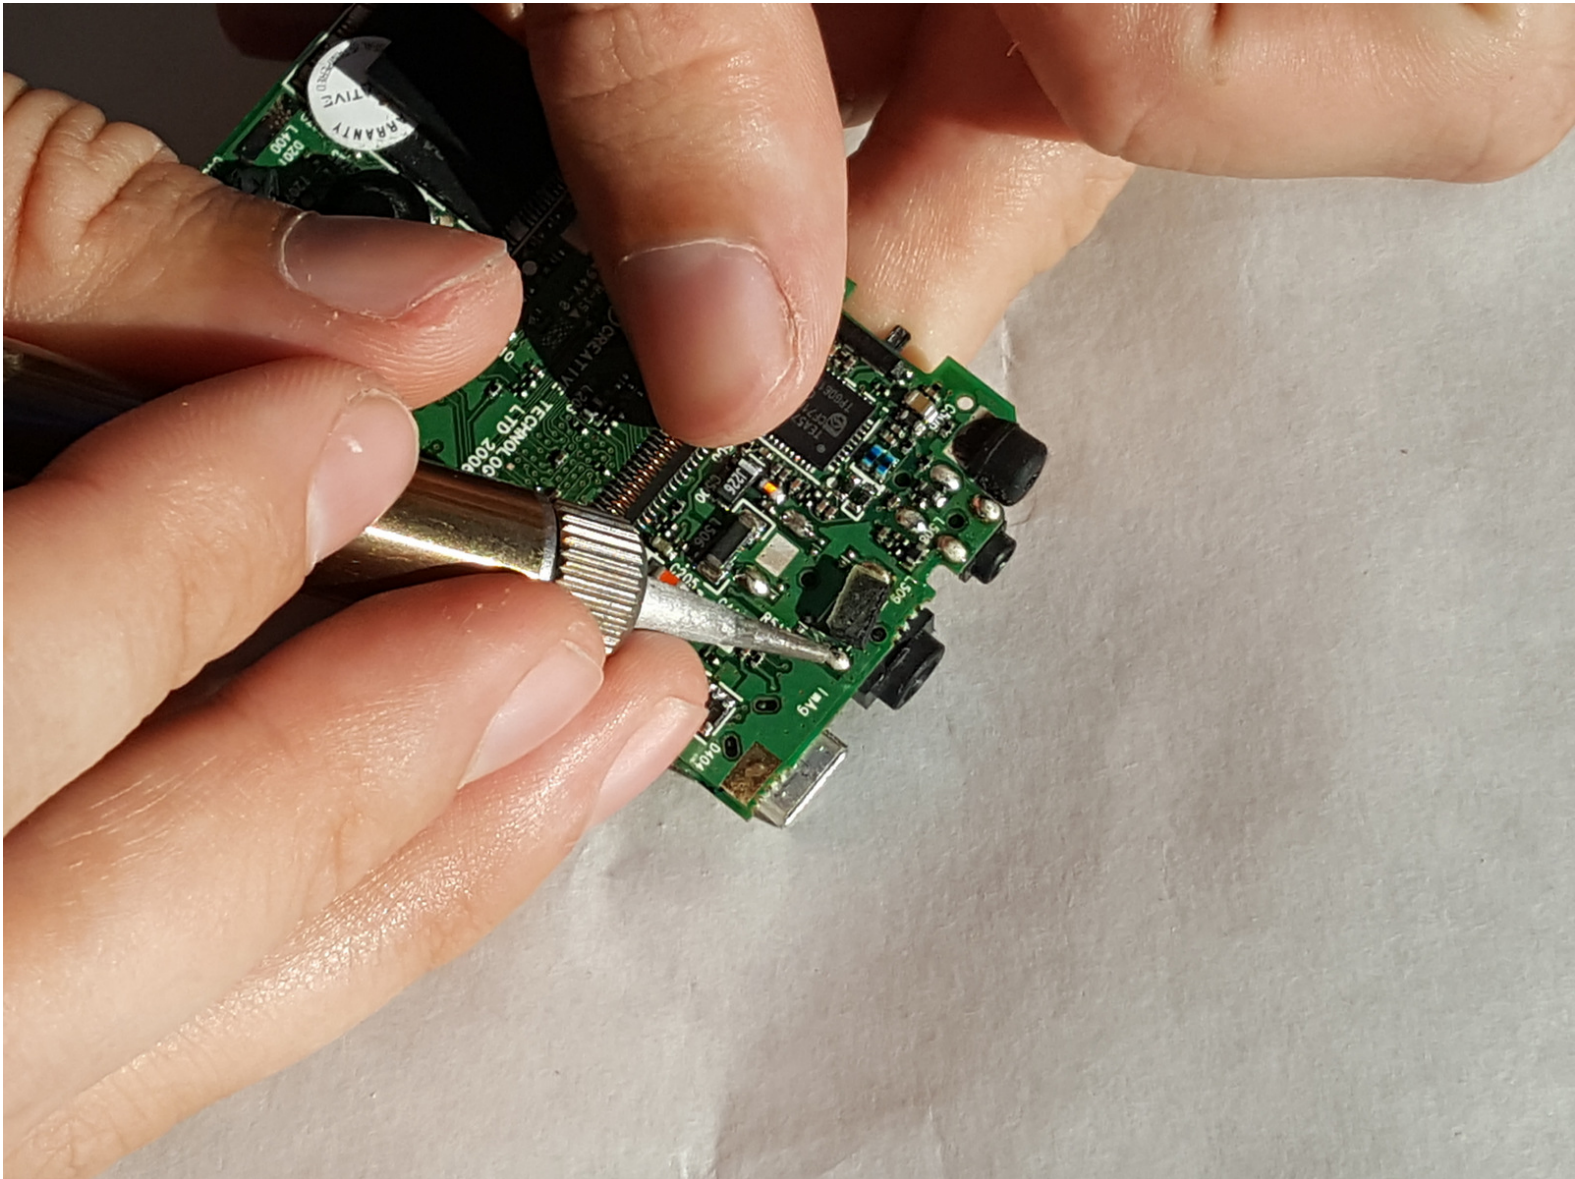

## INTRODUCTION

Before replacing the headphone jack, see the troubleshooting section for the Creative Zen V Plus. You'll also need to know how to desolder and solder components so be sure to learn how with [How To Solder and Desolder Connections!](#)



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Soldering Station](#) (1)



### PARTS:

- [Creative Zen V Plus Charging Port](#) (1)

## Step 1 — Prerequisite Only



- Find the grooves around the buttons on the front and carefully remove the panel. This can be done without the use of any tools.

## Step 2



- Using a plastic opening tool, place the skinny flat end between the groove running along side of the device.
- Using a twisting motion, detach the control panel from the device





### Step 3




- Find the groove around the outside of the green section. Use an **ESD safe** spudger to slowly lift the plastic panel up.

### Step 4

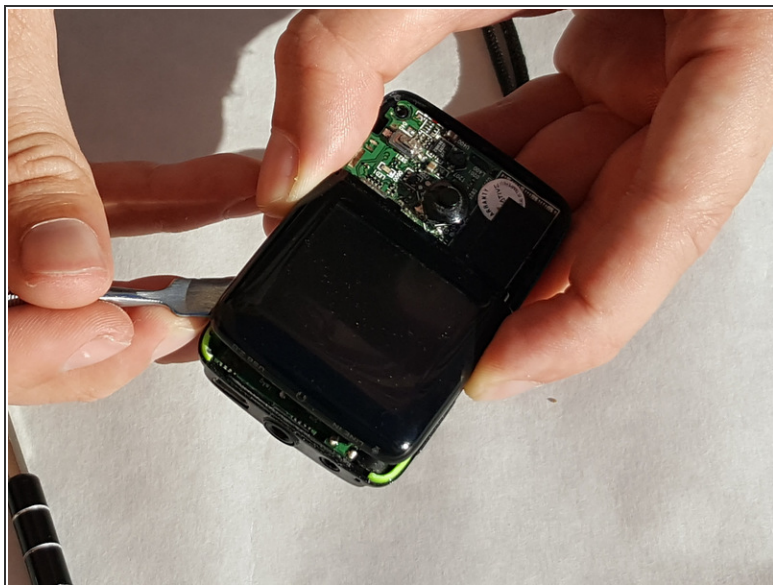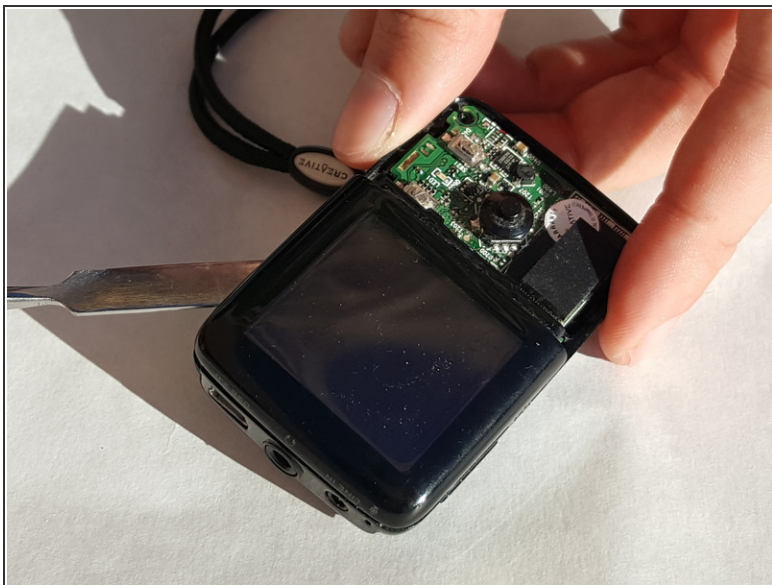


- After removing the green section, find the groove around the display. Insert a **ESD safe** spudger and carefully lift the display.

## Step 5

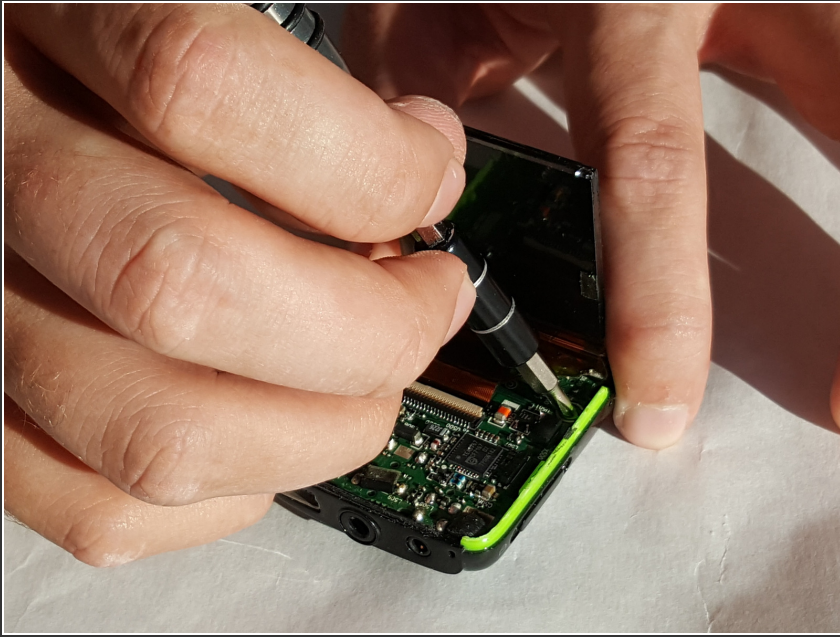

- The display can lift up the display but be sure not to damage any of the cables connecting it to the mother board.
- Remove the screw located under the display using the 00 Phillips head screwdriver.


## Step 6

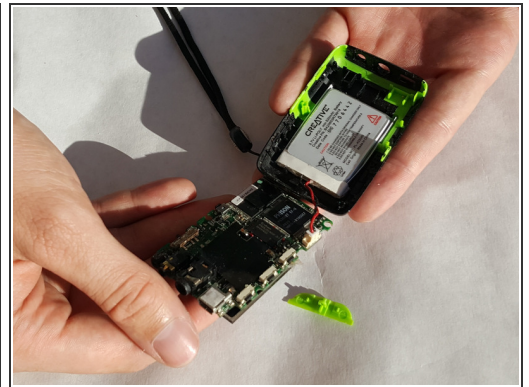

- Pull up on the motherboard and display. It is glued to the base so it will require a little force. Be careful though, as the board is fragile.



## Step 7 — Headphone Jack

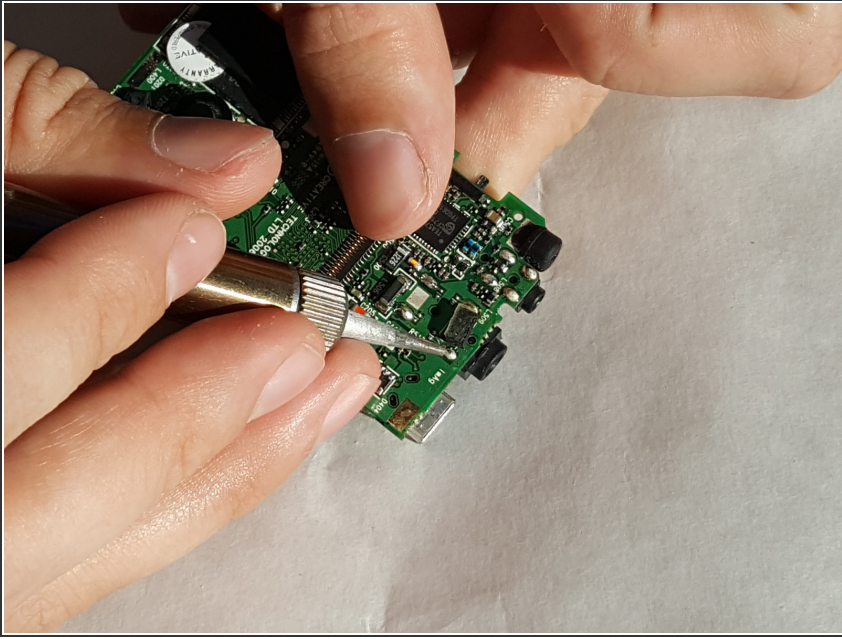

- Locate the circles of metal holding the headphone jack to the logic board. Using a soldering iron, desolder these circles and remove the headphone jack.

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 01:07:32 PM.